

**Diaphragm Control Valves
VC-210 Series
Mini-Max**

GENERAL DESCRIPTION

Model VC-210 Mini-Max Control Valves are built with stainless steel investment castings and especially designed for the control of water, steam, gas, vacuum etc. Valves are single seated, bellows sealed to prevent stem leakage, and may be selected to have the valve action, seating materials and flow characteristics needed for most control applications.

The pneumatic actuator consists of a molded 10 sq. in. Buna-N 2-ply Dacron reinforced diaphragm enclosed in a die-cast aluminum housing and frame. The readily accessible spring adjusting nut provides easy field adjustment of the starting point within the selected spring range. Synthane gaskets located between the valve bonnet and the actuator frame reduce heat transfer to the diaphragm.

OUTSTANDING FEATURES

- Full Ported or Low Flow Designs
- Direct and Reverse-Acting Valve Styles 1/2" 3/4" 1"
- Molded Diaphragms - Reinforced
- "Packless" Stem Seal
- Two-Way and Three-Way Valves
- Stainless Steel Investment Castings



CRN REGISTERED

Buna-N2 Ply Dacron Reinforced Diaphragm Packing


Secondary Teflon*
V-Ring Stem Seals ,

Primary Seamless
Bellows Stem Seal
with Anti-Twist
Device


Stainless Steel Trim

Teflon or Metal-
to-Metal Seating


BR with Reduced
Trim shown

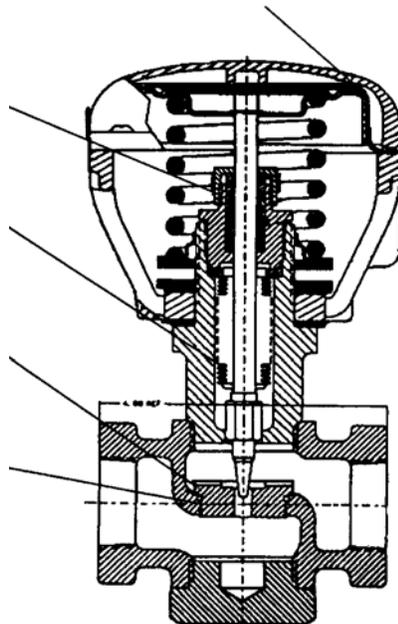


TYPICAL APPLICATIONS

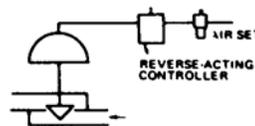

COOLING
Control Valve Action: Air-to-Close.
Action on Air Failure: Valve Opens.
Controller Action: Output decreases with increasing temperature.

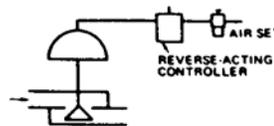

HEATING
Control Valve Action: Air-to-Open
Action on Air Failure: Valve Closes
Controller Action: Output decreases will increasing temperature

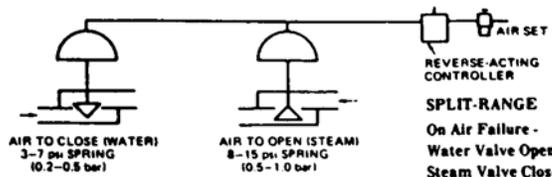

SPLIT-RANGE
On Air Failure -
Water Valve Opens;
Steam Valve Closes.

Note: Above configurations provide fail-safe action, i.e., on air failure a cooling valve will open and heating valve will close. If this valve action is not desired, then reverse above applications and use a direct-acting controller where a reverse-acting type is specified

SPECIFICATIONS

ACTUATOR ASSEMBLY

Nominal Size:10 sq. in.

Action: Direct acting Increasing air pressure moves stem downward.

Nominal Travel:3/8" (9.6 mm)

Maximum Air Pressure:30 psi (2.0 bar)

Maximum Ambient Temperature:180° F (82° C)

Air Connection:..... 1/8" NPT, female

Materials of Construction:

DiaphragmMolded Buna-N 2 ply reinforced

Housing & Frame Die cast aluminum, irridite finished for corrosion resistance, painted bronzeless gold.

SpringZinc plated alloy steel

VALVE ASSEMBLY

Action:

Direct (Provides air-to-close action with actuator)

Reverse (Provides air-to-open action with actuator)

3-way (Top port normally closed)

Valve Body Assembly Ratings:

200 psig for stainless steel bodies at 350° F (13.8 bar at 177° C)

End Connections: Female NPT inlet and outlet

Seat Ring: 316 Stainless Steel, replaceable

Materials of Construction:

Body 316 Stainless Steel

Trim 316 Stainless Steel

Primary Packing316 Stainless Steel bellows


Secondary Packing Spring loaded Teflon chevrons

ACCESSORIES


VC-210 Control Valves are available with the Model P-2 positioner or No. 84589-A2, 110 VAC solenoid valve mounted on the valve and prepped to the actuator.

INNER VALVE CONSTRUCTION

These illustrations represent 3-way and direct-acting body styles. The Teflon O-ring (soft seat) construction is standard in direct and reverse acting styles (See Table 1)

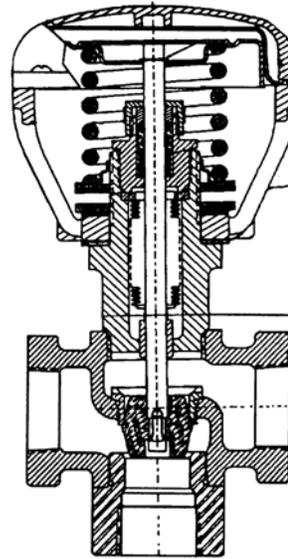

**BNS
3-Way
Metal to Metal
Seating**

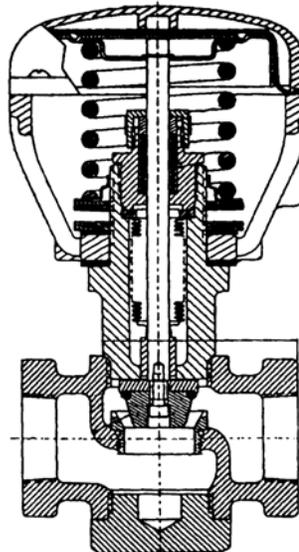

**BR
Direct Acting
Soft Seating**

TABLE I

Valve Style		Valve Body Material	Flow Characteristics		Seating Style	Trim Material	Valve Size, In.	Cv (EQ %)		Cv (Q.O.)		Cv (Lin.) 3-Way
Direct Acting	Reverse Acting		EQ %	Q.O.				DA	RA	DA	RA	
BR	BRR	316 St. St.	EQ %	Q.O.	Teflon O-Ring	316 St. St.	1/2	2.3 *	2.3	4	4	
							3/4	7.3	7.3	8	8	
							1	9.5	9.5	10	10	
3-Way BNS		St. St.	Linear		St. St. Seat Ring/Plug	316 St. St.	1/2					2.2
	3/4										4.6	
	1										9.0	


* 1/2" DA is Available with 1/4" Reduced Port.

Cv = 0.6, 0.3, & 0.1 - Linear Flow

DIMENSIONS, SHIPPING WEIGHTS

(All dimensions in inches (mm)).

1/8" - NPT
Female Air
Connection

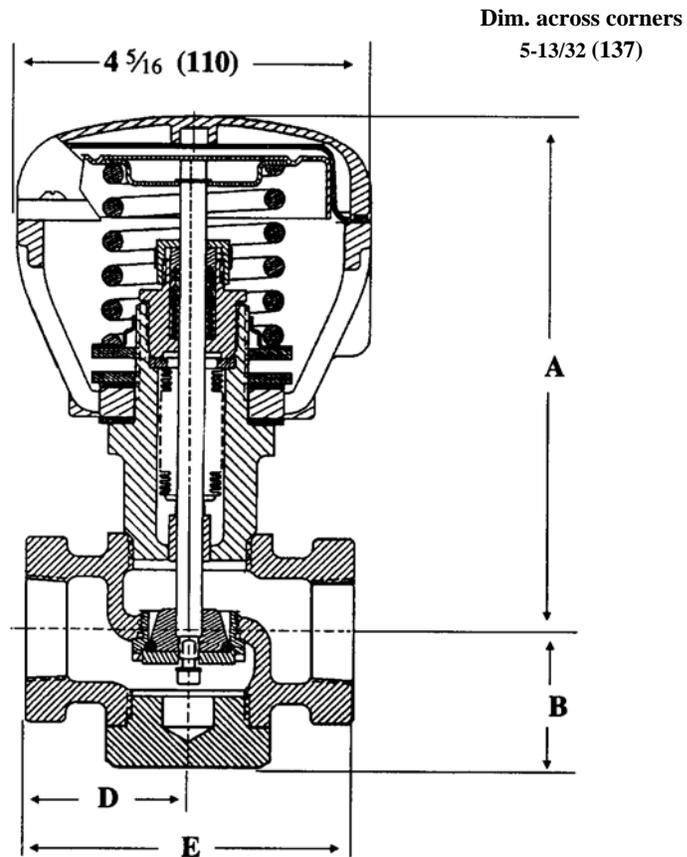

Two-Way BRR
Shown

TABLE II

Valve	Pattern	Body Material	Dimension	Valve Size In.		
				1/2"	3/4"	1"
BR BRR	2-Way	316 Stainless Steel	A	6-3/8 (160)	6-3/8 (160)	6 3/8 (160)
			B	1-3/4 (44)	1-3/4 (44)	1-3/4 (44)
			D	2 (50.8)	2 (50.8)	2 (50.8)
			E	4 (102)	4 (102)	4 (102)
BNS	3-Way	316 Stainless Steel	A	6-3/8 (160)	6-3/8 (160)	6-3/8 (160)
			B	2-3/16 (55)	2-3/16 (55)	2-3/16 (55)
			D	2 (50.8)	2 (50.8)	2 (50.8)
			E	4 (102)	4 (102)	4 (102)
All Styles			Shipping Wt. Lbs. (kg)	6.1(2.8)	6.1(2.8)	6.1(2.8)

MAXIMUM ALLOWABLE PRESSURE DROP

When the control valve is required to close off against the full upstream pressure with 0 psig on the downstream side of the valve, the upstream pressure should be considered as the maximum pressure drop. The tabulated maximum pressure drops are for throttling service only. Where rapid cycling or On-Off type service

the application, the pressure differential across a VC-210 control valve should not exceed 50 psi (3.45 bar). In any case the upstream pressure should not exceed 100 psi (6.89 bar). The tabulated ratings are based on 3-15 (0.2 - 1.0 bar) signal.

TABLE III

NOMINAL VALVE SIZE	BENCH TEST SPRING RANGES †						
	AIR TO CLOSE		AIR TO OPEN			3-WAY	
	3-12 psi* 0.2-0.8 bar	3-7 psi 0.2-0.5 bar	6-15 psi* 0.4-1.0 bar	8-15 psi 0.55-1.0 bar	11-15 psi 0.75-1.0 bar	5-14 psi* 0.3-0.9bar	9-13 psi 0.6-0.9 bar
MAX. ALLOWABLE PRESSURE DROP							
1/2	90	100	100	100	100	60	100
3/4	50	100	100	100	100	35	80
1	30	90	50	80	100	20	40

* Standard Springs

† Bench Test with 0 psi in valve body.

Ordering Information

Specify:

1. Complete Model No.

Example: 1/2" VC-210 BR (for air to close control valve).

3/4" VC-210 BRR (for air open control valve).

2. Quantity

3. Bench test spring range required. (If other than standard).
See Table III.

4. Medium through valve.

5. Upstream Pressure.

6. Pressure drop.

7. Shipping and billing instructions.



U.S.A. & Canada

Robertshaw Industrial Products
1602 Mustang Drive
Maryville, Tennessee 37801
Phone: (865) 981-3100 Fax: (865) 981-3168
<http://www.robertshawindustrial.com>

Exports

Invensys Appliance Controls
1701 Byrd Avenue
P.O. Box 26544
Richmond, Virginia 23261-6544
Phone: (804) 756-6500 Fax: (804) 756-6561

